



SNAIGÉ
M E D I C A L



**SNAIGÉ MEDICAL
REFRIGERATORS**

SNAIGÉ PHARMACEUTICAL REFRIGERATORS ENSURING OPTIMAL MEDICATION STORAGE

Compliance with Regulations

Our refrigerators adhere to industry standards and regulatory requirements, including DIN 13277, ensuring strict compliance with legal and safety standards for pharmaceutical storage.

Reliability and Safety

Our appliances guarantee precise temperature control, maintaining a stable environment crucial for the effectiveness and safety of stored medications, vaccines, and samples. Safety features such as alarm systems provide immediate alerts for temperature deviations, ensuring the integrity of stored medications.

Focus on Customer Needs

We prioritize understanding and meeting the specific requirements of our customers, ensuring that our products and services are tailored to their preferences and objectives.



DIN



Digital temperature display



Temperature alarm



Effective fan forced cooling



R600a & R290 refrigerant



Automatic defrost system

PHARMACEUTICAL REFRIGERATORS

SNAIGÉ PHARMACEUTICAL REFRIGERATORS ENSURING OPTIMAL MEDICATION STORAGE

European Production Quality and Materials

Our products meet strict European production standards, guaranteeing exceptional quality. Crafted from premium materials, each refrigerator ensures durability, reliability, and compliance with industry regulations.

Easy Logistics and Accessibility

Our strategically located production facilities in Europe ensure seamless logistics and timely delivery worldwide. With efficient distribution networks, we prioritize convenience for medical facilities to procure our refrigerators confidently.

Affordable Prices Without Compromising Quality

Despite our commitment to quality, our refrigerators are competitively priced, offering a cost-effective solution for all sizes of medical facilities.

SNAIGÉ MEDICAL refrigerators are backed by a **5-year warranty**.

Energy Efficiency

SNAIGÉ pharmaceutical refrigerators are designed to minimize energy consumption, reducing operating costs and supporting sustainability in medical facilities.

Ease of use and maintenance

SNAIGÉ refrigerators offer intuitive controls and easy maintenance. Staff can efficiently manage the refrigerator, thanks to accessible components for simplified servicing.

SNAIGÉ MEDICAL PRODUCT RANGE

MEDICAL MAX PLUS line



- Access port.
- Data transfer via Bluetooth (mobile app) and RS485 network.
- Optical and acoustical power failure alarm for at least 24 hours.
- Optical and acoustical temperature alarm.
- Min/Max temperature display on the screen.
- Alarm indicator after temperature changes. Stays visible until removed manually.
- Connection to an external alarm system.
- Emergency power supply to the controller.

MEDICAL MAX line



- Access port.
- Data transfer via USB and RS485 network.
- Optical and acoustical power failure alarm for at least 12 hours.
- Optical and acoustical temperature alarm.
- Connection to an external alarm system.
- Emergency power supply to the controller.

MEDICAL STANDARD line



- Access port.
- Optical and acoustical temperature alarm.

SNAIGĒ MEDICAL MAX PLUS line



SNAIGĒ
M E D I C A L



SNAIGÉ MEDICAL MAX PLUS line

Product	MD40DD-P3	MD40DD-P6	MD35DD-P3	MD35DD-P6	MD14DD-P3	MD14DD-P6
Net capacity	290 L		240 L		100 L	
Dimensions (H x W x D)	2025 x 600 x 600 mm		1810 x 600 x 620 mm		870 x 560 x 620 mm	
Prod. storage temp. range	+2 to +8 °C		+2 to +8 °C		+2 to +8 °C	
Preset temp.	+5 °C		+5 °C		+5 °C	
Fluctuation	0,5 °C		0,5 °C		0,5 °C	
Gradient	2,9 °C		2,9 °C		2,9 °C	
Noise level	44 dB		50 dB		42 dB	
Energy consumption (kWh/24h)	1.28	0.95	1.77	1.77	0.75	0.48

SNAIGÉ MEDICAL refrigerators are backed by a **5-year warranty**. The electronic controller includes a 3-year warranty.

- Safety standard according to IEC 60335-2-89
- DIN 13277: expected to receive standard at September
- Access port for the external connections.
- Performance data and alarms monitoring in the event of deviations.
- Data transfer via Bluetooth (mobile app) and RS485 network.
- Optical and acoustical temperature alarm.
- Optical and acoustical power failure alarm for at least 24 hours.
- Emergency power supply to the controller.
- Connection to an external alarm system.
- Min/Max temperature display on the screen.
- Alarm indicator after temperature changes. Stays visible until removed manually.
- Automatic defrost.
- Reversible door.
- Self closing door.



MD40DD-P6



MD40DD-P3



MD35DD-P6



MD35DD-P3



MD14DD-P6



MD14DD-P3

SNAIGÉ MEDICAL MAX PLUS line FEATURES

OPTIONAL FEATURES:

- Solid door.
- Organizers in MD40DD.
- Metal shelves.
- Additional shelves.



Electronic controller with data transfer via Bluetooth (mobile app) and RS485 network.

SNAIGÉ
M E D I C A L



Protection against contact with a cold surface.



Method of shelf fixing in MD40DD with metal holders.



Effective fan forced cooling.



Method of shelf fixing in MD35DD on guides.




Temperature probes. Access port.



Method of shelf fixing in MD14DD with plastic holders.



Ceiling (MD35DD, MD14DD) or vertical LED lightening.



Vertical metallic painted handle. Self closing door. Mechanical door lock for a safe storage of medicines.

SNAIGÉ MEDICAL MAX PLUS line

ELECTRONIC CONTROLLER COMPATIBLE WITH DIN 13277



SNAIGÉ
M E D I C A L


- LED touch screen;
- Optical and acoustical temperature alarm;
- Optical and acoustical power failure alarm for at least 24 hours;
- Data transfer via Bluetooth (mobile APPs);
- Min/Max temperature display on the screen;
- Alarm indicator after temperature changes. Stays visible until removed manually;
- Emergency power supply to the controller;
- Safety controller;
- Connection to an external alarm system;
- Protection against low temperatures;
- Connection for data transmission via RS485 network.



CONTROLLA – for end users.
APPLICA – for Service

App Store

Google play

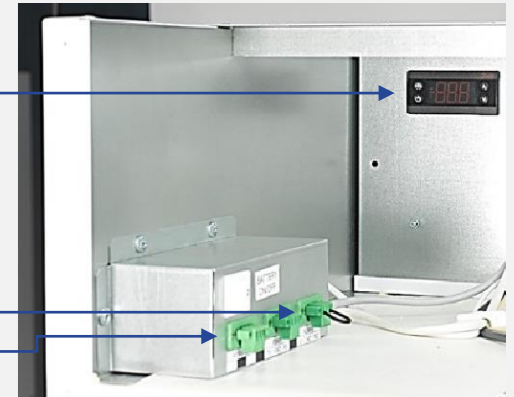

SNAIGĒ MEDICAL

MAX line



SNAIGĒ
M E D I C A L



SNAIGĒ MEDICAL MAX line

Product	MD40DD-P3	MD40DD-P6	MD35DD-P3	MD35DD-P6
Net capacity	290 L		240 L	
Dimensions (H x W x D)	2025 x 600 x 600 mm		1810 x 600 x 620 mm	
Prod. storage temp. range	+ 2 to + 8 °C		+ 2 to + 8 °C	
Preset temperature	+ 5 °C		+ 5 °C	
Fluctuation	0,5 °C		0,5 °C	
Gradient	2,9 °C		2,9 °C	
Noise level	50 dB		50 dB	
Energy consumption (kWh/24h)	1.903	1.44	1.77	1.77
DIN 13277	Yes		Complies with the requirements	



MD40DD-P6 MD40DD-P3

SNAIGĒ MEDICAL refrigerators are backed by a **5-year warranty**. The electronic controller includes a 3-year warranty.

- Safety according to IEC 60335-2-89
- Compliance with DIN 13277
- Access port for the external connections.
- Optical and acoustical temperature alarm.
- Optical and acoustical power failure alarm for at least 12 hours.
- Emergency power supply to the controller.
- Connection to an external alarm system.
- Data transfer via USB and RS485 network.
- Automatic defrost.
- Reversible door.
- Self closing door.



MD35DD-P6 MD35DD-P3

SNAIGÉ MEDICAL MAX line FEATURES

OPTIONAL FEATURES:

- Solid door.
- Organizers in MD40DD.
- Metal shelves.
- Additional shelves.



Protection against contact with a cold surface.



Effective fan forced cooling.



Temperature probes.
Access port.



Ceiling LED lightening.



Electronic controller with USB data transfer and RS485 connection.



Vertical metallic painted handle.
Self closing door.
Mechanical door lock for a safe storage of medicines.



Method of shelf fixing in MD40DD with metal holders.



Method of shelf fixing in MD35DD on guides.


SNAIGÉ MEDICAL MAX line

ELECTRONIC CONTROLLER COMPATIBLE WITH DIN 13277



SNAIGÉ
M E D I C A L

- LED display;
- Optical and acoustical temperature alarm;
- Optical and acoustical power failure alarm for at least 12 hours;
- Temperature recording and transfer via USB;
- Emergency power supply to the controller;
- Safety controller;
- Connection to an external alarm system;
- Protection against low temperatures;
- Connection for data transmission via RS485 network.

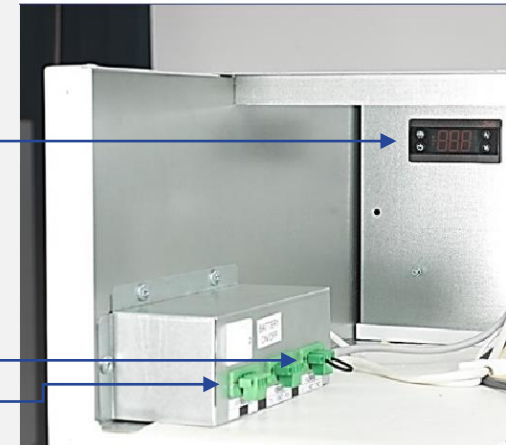

SNAIGÉ MEDICAL MAX line

CONTROLLER FUNCTIONS AND BENEFITS:



SNAIGÉ
M E D I C A L

- Temperature recording and alarm recording functions;
- Transfer of saved data to a USB storage (it comes together with refrigerator);
- Emergency 12- hour power supply and alarm function;
- Setting the maximum allowable temperature limit;
- Setting the minimum allowable temperature;
- Possibility to connect an external alarm system;
- Possibility to connect to external temperature and other parameters monitoring system XWEB (purchased separately).



LED	Mode	Function
❄	On	Compressor enabled
❄	Flashing	Anti-short cycle delay enabled
❄	On	Defrost enabled
❄	Flashing	Drip time in progress
🌀	On	Fan enabled
🌀	Flashing	Fans delay after defrost in progress
🔊	On	An alarm is occurring
🕒	On	Recording activated
🔋	On	Battery status OK
🔋	Flashing	Charging problem or battery failure
°C/°F	On	Measurement unit
°C/°F	Flashing	Programming phase

SNAIGĒ MEDICAL STANDARD line



SNAIGĒ
M E D I C A L



SNAIGĒ MEDICAL STANDARD line

Product	MD70DC-P3* MD70DC-P6*	MD40DC-P3 MD40DC-P6	MD14DC-P3 MD14DC-P6		
Net capacity	500 L	290 L	100 L		
Dimensions (H x W x D)	2084 x 705 x 886 mm	2025 x 600 x 600 mm	870 x 560 x 620 mm		
Prod. storage temp. range	+ 2 to + 8 °C	+ 2 to + 8 °C	+ 2 to + 8 °C		
Preset temp.	+ 5 °C	+ 5 °C	+ 5 °C		
Fluctuation	0,5 °C	0,5 °C	0,5 °C		
Gradient	2,9 °C	2,9 °C	2,9 °C		
Noise level	TBC	50	42		
Energy consumption (kWh/24h)	TBC	1.28	0.95	0.75	0.48

*The model is being projected

SNAIGĒ MEDICAL refrigerators are backed by a **5-year warranty**. The electronic controller includes a 3-year warranty.

- Access port for the external connections.
- Automatic defrost.
- Reversible doors.
- Optical and acoustical temperature alarm.
- Effective fan forced cooling.
- Self closing door.



MD70DC-P6



MD70DC-P3



MD40DC-P6



MD40DC-P3



MD14DC-P6



MD14DC-P3

SNAIGÉ MEDICAL STANDARD line FEATURES

OPTIONAL FEATURES:

- Solid doors.
- Door opening pedal and castors with brake at the front (MD70).
- Organizers (MD40DC).
- Metal shelves.
- Additional shelves.




Electronic controller.

SNAIGÉ
M E D I C A L



Protection against contact with a cold surface.



Vertical metallic painted handle.
Self closing door.
Mechanical door lock for a safe storage of medicines.



Effective fan forced cooling.



Method of shelf fixing in MD70 on guides.



Access port.



Method of shelf fixing in MD40DC with metal holders.



Ceiling LED strip (MD70, MD14DC) or vertical LED lightening.



Method of shelf fixing in MD14DC with plastic holders.

SNAIGĒ LABORATORY line



SNAIGĒ
M E D I C A L



SNAIGÉ LABORATORY line

Product	LD40DD-P3	LD40DD-P6	LD35DD-P3	LD35DD-P6	LD14DD-P3	LD14DD-P6
Net capacity	290 L		240 L		100 L	
Dimensionas (H x W x D)	2025 x 600 x 600 mm		1810 x 600 x 620 mm		870 x 560 x 620 mm	
Prod. storage temp. range	+ 3 to + 15 °C		+ 3 to + 15 °C		+ 3 to + 15 °C	
Preset temp.	+ 5 °C		+ 5 °C		+ 5 °C	
Fluctuation	0,5 °C		0,5 °C		0,5 °C	
Gradient	2,9 °C		2,9 °C		2,9 °C	
Noise level	44 dB		50 dB		42 dB	
Energy consumption (kWh/24h)	1.28	0.95	1.77	1.77	0.75	0.48

- Safety standard according to IEC 60335-2-89

- Access port for the external connections
- Performance data and alarms monitoring in the event of deviations.
- Data transfer via Bluetooth (mobile app) and RS485 network.
- Optical and acoustical temperature alarm.

- Optical and acoustical power failure alarm for at least 24 hours.
- Emergency power supply to the controller.
- Connection to an external alarm system.
- Min/Max temperature display on the screen.

- Alarm indicator after temperature changes. Stays visible until removed manually.
- Automatic defrost.
- Reversible door.
- Self closing door.



LD40DD-P6



LD40DD-P3



LD35DD-P6



LD35DD-P3



LD14DD-P6



LD14DD-P3

SNAIGĒ LABORATORY line

Product	LD70DC-P3* LD70DC-P6*	LD40DC-P3	LD40DC-P6	LD14DC-P3	LD14DC-P6
Net capacity	500 L	240 L		100 L	
Dimensionas (H x W x D)	2084 x 705 x 886 mm	1810 x 600 x 620 mm		870 x 560 x 620 mm	
Prod. storage temp. range	+3 to +15 °C	+3 to +15 °C		+3 to +15 °C	
Preset temp.	+5 °C	+5 °C		+5 °C	
Fluctuation	0,5 °C	0,5 °C		0,5 °C	
Gradient	2,9 °C	2,9 °C		2,9 °C	
Noise level	TBC	50 dB		42 dB	
Energy consumption (kWh/24h)	TBC	1.28	0.95	0.75	0.48

*The model is being projected

- Access port for the external connections.
- Optical and acoustical temperature alarm.
- Automatic defrost.
- Effective fan forced cooling.
- Reversible doors.
- Self closing door.



LD70DC-P6



LD70DC-P3



LD40DC-P6



LD40DC-P3



LD14DC-P6



LD14DC-P3

**ABOUT
SNAIGĒ**



FACTS & FIGURES

- European producer of professional, medical and home refrigeration appliances with more than 60 years of experience in this business.
- Manufactures over 30 models and 300 different variations of high-quality medical refrigerators, commercial refrigeration equipment and household appliances.
- Ordinary shares of SNAIGE AB are quoted in OMX Vilnius Stock Exchange in the Secondary List
- Around 90% of its production is exported nearly to 30 countries in Europe.
- SNAIGE works according to international standards and owns ISO 9001, ISO 1400, BS OHSAS 18001, TÜV, CE Déclaration/ISO9001, EMC Directive 2014/30/EU, Machinery Directive 2006/42/EC, DIN 13277 certificates.
- The company has been awarded with the Lithuanian Innovation Prize and Exporter of the Year Award several times and is recognized as one of the most innovative companies in the country.



PRODUCT RANGE


HOME APPLIANCES



Refrigerators without freezers



Fridge-freezers with freezer at top



Refrigerators with freezer inside



Fridge-freezers with freezer at bottom



Freezers



Wine refrigerators

PROFESSIONAL EQUIPMENT



Pharmaceutical refrigerators



Glass door coolers



Professional refrigerators and freezers



Storage refrigerators and freezers



Monoblock refrigeration units




Cold rooms

SALES MARKETS

Snaige has well balanced sales platform between contract manufacturing and branded sales.

23

SALES SHARE BY MAIN MARKETS

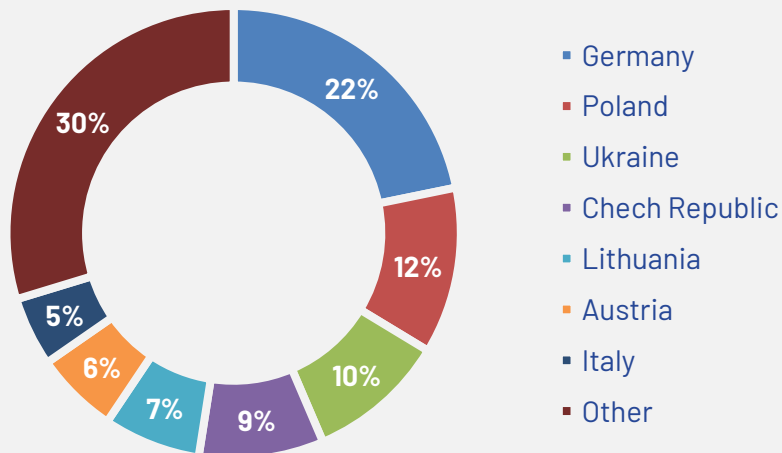

- SNAIGE exports its products to around 30 countries mainly in Europe.
- Main SNAIGE branded markets are Czech Republic, Bulgaria, Hungary, Ukraine, Moldova, Lithuania, etc.

SNAIGĒ

CONTRACT MANUFACTURING SALES



BOMANN®

NordCap®

Bartscher



- For contract manufacturing, Company's clients are producers (e.g. Severin, Bomann, Whirlpool) large retailers (e.g. Orima (Portugal) and distributors: KBS (Germany), Nord Cap (Germany).
- Contract manufacturing (OEM) takes around 50 % of the Company's sales.

PRODUCTION FACILITIES AND TECHNOLOGIES



- Production site is located in Alytus, Lithuania. The annual capacity is 550.000 units.
- Operates employs 300 people.
- Production process is very flexible, efficient and reliable thanks to modern equipment, appropriate production line set-up and experienced workforce.
- Product failure rates are well below the industry average.

SNAIGĖ



STRICT QUALITY CONTROL

All SNAIGÉ refrigerators leave the factory after being carefully inspected.

MADE IN EUROPE

We are a European producer with a European understanding of quality and partnership.

Most parts and materials are manufactured in Western Europe by reliable and well-known producers.

ECO FRIENDLY AND SAFE

All SNAIGÉ products are ecologically friendly, produced without harmful substances and meet the EU Restriction of Hazardous Substances Directive and RoHS requirements.

97% of SNAIGÉ refrigerator components are recyclable.

SNAIGÉ



THANKS!

Any questions?

Contact us: snaige@snaige.lt

- Phone +370 315 56206
- Mob. +370 656 35923
- AB SNAIGĖ, Pramonės str. 6
LT-62175, Alytus, Lithuania

More information:

www.snaigeprofessional.lt

SNAIGĖ



SNAIGĒ
M E D I C A L